

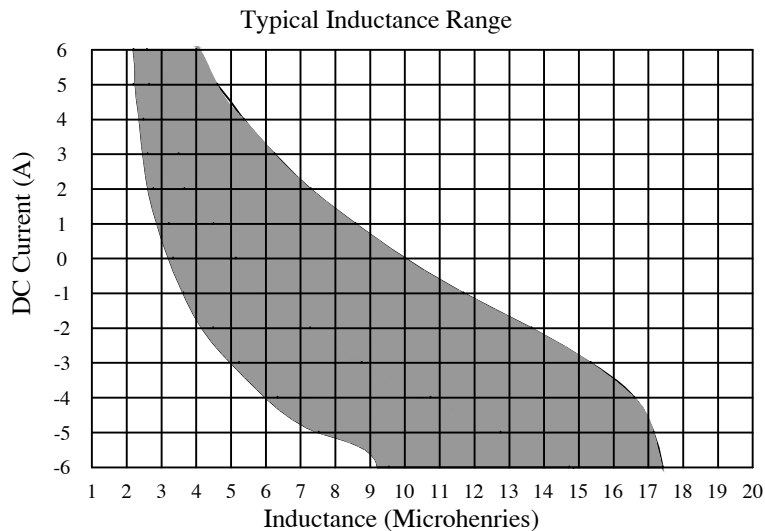


- CRT DISPLAY MAGNETICS.
- STANDARD LINEARITY COIL, < 6.0A PEAK.
- HORIZONTAL LINEARITY COILS ARE USED TO CORRECT THE IMBALANCE BETWEEN THE RIGHT AND LEFT-HANDED SIDES OF THE CRT PICTURE SO THAT THEY ARE THE SAME SIZE.
- THESE MAGNETICALLY BIASED LINEARITY COILS ARE FINGERTIP ADJUSTABLE TO COMPENSATE FOR STANDARD MANUFACTURED MATERIAL TOLERANCES OF OTHER COMPONENTS IN YOUR DISPLAY CIRCUIT.
- TYPICAL UNITS CAN BE ADJUSTED TO COVER THE RANGES INDICATED ON THE GRAPHS BELOW.
- THESE UNITS MEET OR EXCEED ALL FLAMMABILITY REQUIREMENTS OF UL94V-2.
- CUSTOM UNITS ARE ALSO AVAILABLE FOR YOUR SPECIFIC DISPLAY CIRCUIT REQUIREMENTS.

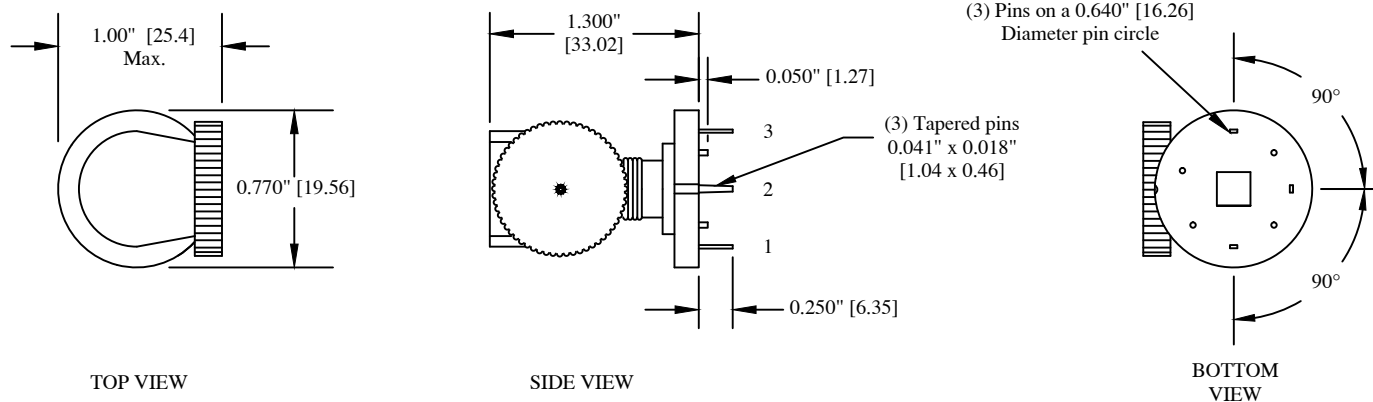

DC Resistance: 0.023 - 0.032 Ohms



Mech - Elect Prem 8255

Notes

ALL DIMENSIONS ARE FOR REFERENCE ONLY

[ ] = millimeters

**PREM**  
MAGNETICS INCORPORATED  
3521 N. CHAPEL HILL RD.  
JOHNSBURG, IL 60051

PREM Part  
8255  
MECHANICAL -  
ELECTRICAL

Approved: TJK

Scale: None

Date: 03/01/2004