

Notes

ALL DIMENSIONS FOR REFERENCE ONLY










[] = millimeters

PREM
 MAGNETICS INCORPORATED
 3521 N. CHAPEL HILL RD.
 JOHNSBURG, IL 60051

Mech - Elect PREM
 PART # SPG-100
 through SPG-105

Approved: TJK
 Scale: NONE
 Date: 11/16/2015

- WIDE BAND SHIELD BEAD, FERRITE CORE CHOKES FOR USE IN ATTENUATING EMI AND OTHER UNWANTED SIGNALS IN A CIRCUIT WITHOUT CONTRIBUTING TO POWER LOSSES AT LOW FREQUENCIES OR DC.
- IMPEDANCES FROM 10Ω TO 600Ω ARE AVAILABLE OVER FREQUENCY RANGES FROM 1.0MHZ TO 500MHZ
- AXIAL AND RADIAL LEADED

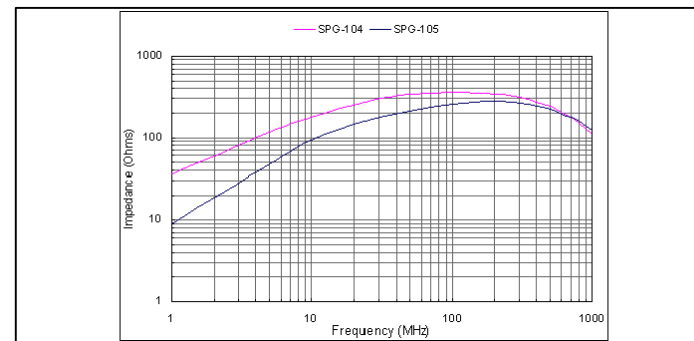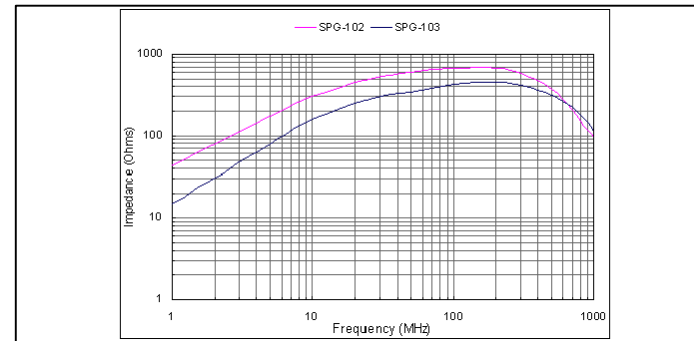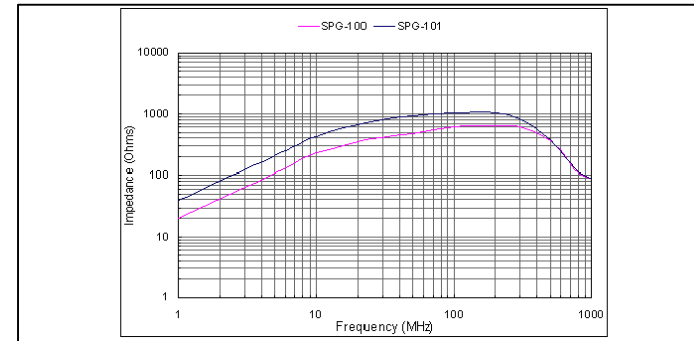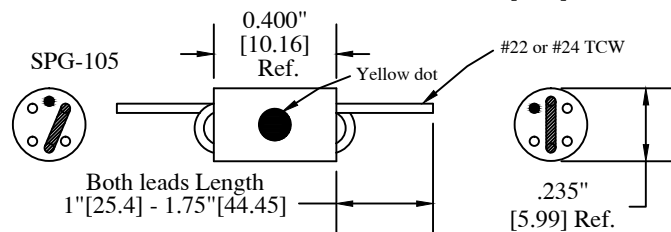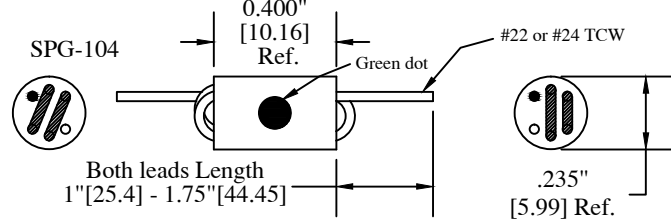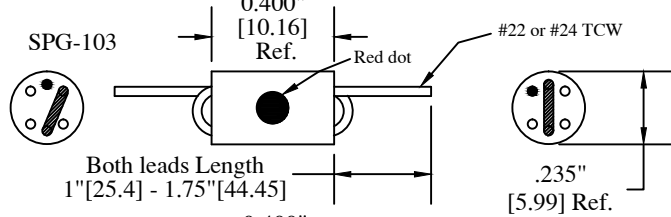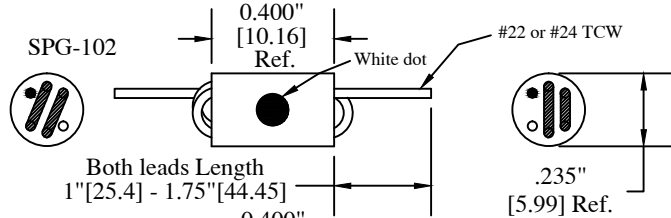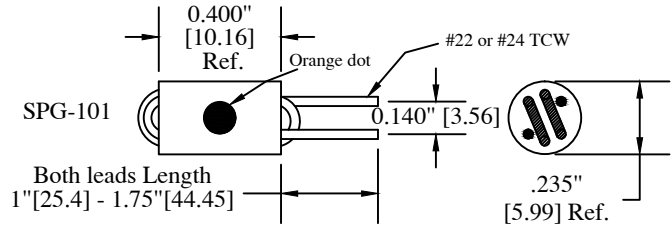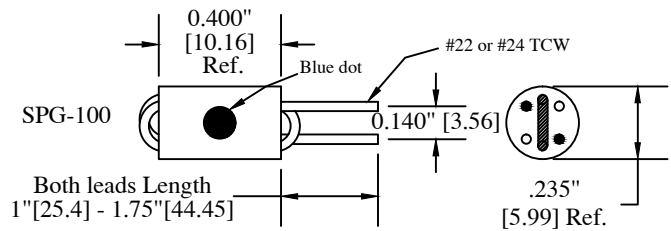

DATE	ISS	REVISION	CHECKED