


- HIGH SPEED DATA TELEPHONY TRANSFORMERS FOR VOICE, DATA AND xDSL APPLICATIONS.
- LOW PROFILE (0.470"/11.94mm MAX HEIGHT)
- SMALL BOARD AREA USAGE (<.946"/24.03mm SQUARE)
- FOR LEVEL ONE'S SK70704/70707 1168 Kbps HDSL DATA PUMP


REVISIONS			
DATE	REV	DESCRIPTION	APPV'D
3-20-00	-1	Chg'd L Tol. from 6% to 5%	G.G.
6-05-00	-2	Add .945 dimension across pin rail.	G.G.
04-04-16	-3	Updated entire drawing	Tjk

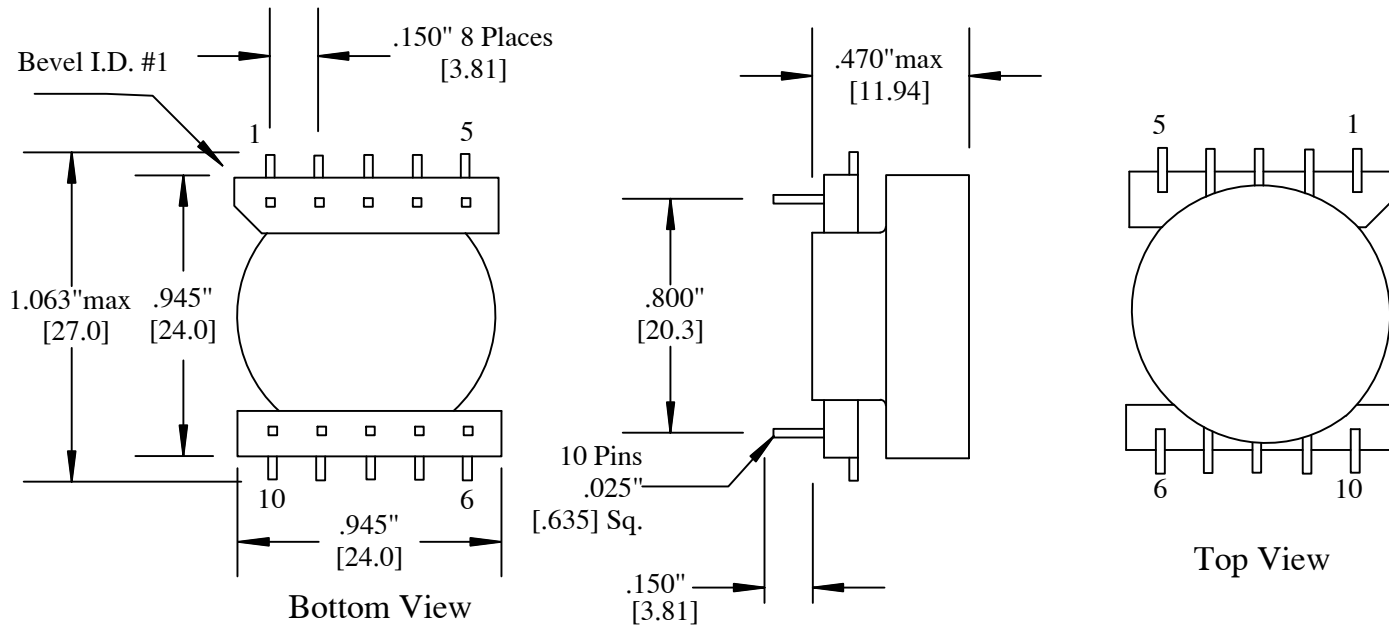

Electrical Parameters

- Primary Dcr : 2.35 Ohms Max
- Secondary Dcr : 1.0 Ohm Max
- Turns Ratio : 1.8 : 1.0 ± 1%
- Inductance 6 - 10 : 1.94 mH ± 5%
@ 10 KHz, 0.10V
- Dielectric Strength : 1500Vrms 1min.

Note : All Dimensions are reference unless otherwise specified. [] = mm

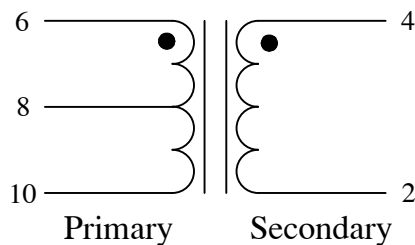

PREM[®]
MAGNETICS INCORPORATED

CUSTOM ENGINEERING MAGNETIC COMPONENTS
Johnsburg, Illinois
3521 N. Chapel Hill Rd. / McHenry, Illinois 60051

SCALE: 1:1.5

APPROVED BY:

DRAWN BY G.G.

DATE: 10-4-99

Tj Klotz

REVISED

For Level One's SK 70704/70707 1168 Kbps HDSL Data Pump

P/N SPT-2000

DRAWING NUMBER

B-SPT-2000 - 3