


- VOICE & DATA APPLICATIONS.
- FOR V.29 MODEMS (9.6Kbps)
- DESIGNED FOR WET (80mA DC) CIRCUITS.
- IMPEDANCE RATIO OF $900 \Omega : 600 \Omega$
- ALTERNATE ECONOMY PART SPT-192.
- UL RECOGNIZED COMPONENT - UL 1863, FILE E138250

REVISIONS

DATE	REV	DESCRIPTION	APPV'D
05/16/85	-1	Updated	WDE
05/18/1989	-2	Changed max width and length	TJK
09/17/1993	-3	Changed THD spec was specified in %	TJK
01/25/2016	-4	Update; added millimeters	TJK


All dimensions are reference unless otherwise specified.

All 8 Pins are
0.025" [0.635] Square

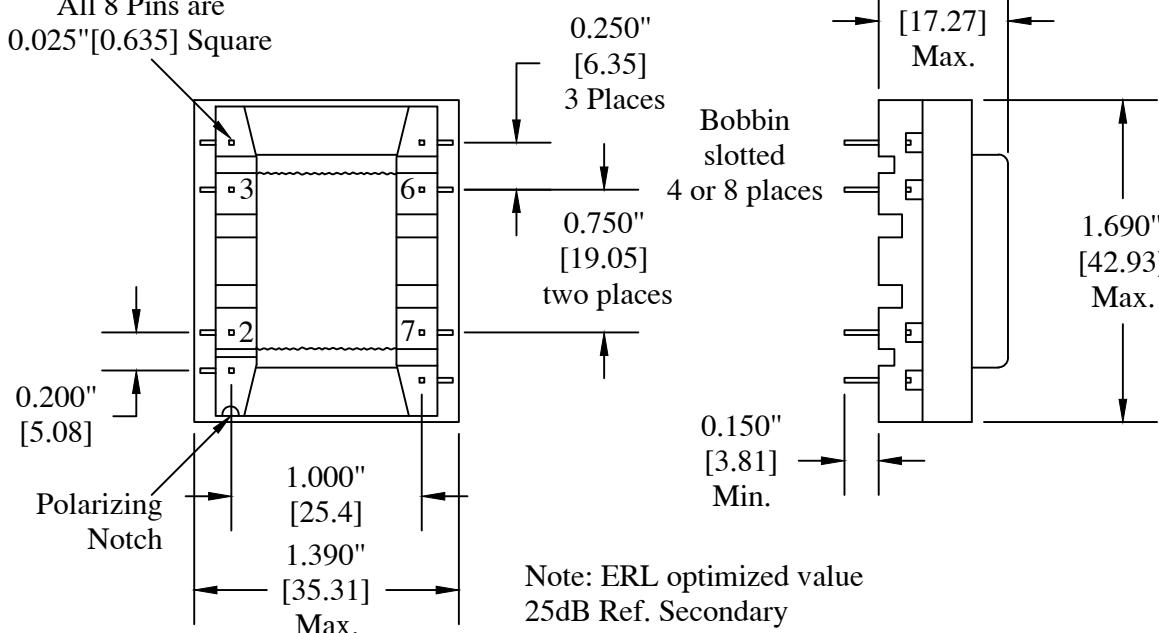

Note : Pin Numbers
are reference only. []
= mm

Schematic

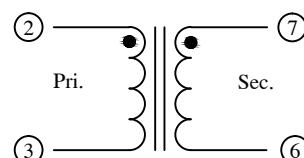

Electrical Parameters:

Primary Impedance : 900Ω
Secondary Impedance : 600Ω
Turns Ratio : $1:0.8168 \pm 2\%$
DC Resistance :
Primary $76 \Omega \pm 10\%$
Secondary $92 \Omega \pm 10\%$
Max DC Current : 80 mA DC
Frequency Range : 300-3500Hz
Insertion Loss : 1.55B Ref. @ 1KHz
Frequency Response : ± 0.5 dB, 1KHz Ref.
Return Loss : 11.0 dB Min. @ 300Hz
Longitudinal Balance : 60dB Min, per IEEE
Dielectric 1500VRms : P-S-C, 1 Second
THD @ 0dbm, 300Hz : -65dB typical
600 Ohm load for transmission tests

Note : Reflected Z = 1070 Ref. (Ohms)
@ 1KHZ, 80mA D.C./Primary & 600Ohm
RL/Secondary

PREM®
MAGNETICS INCORPORATED

CUSTOM ENGINEERING MAGNETIC COMPONENTS
Johnsburg, Illinois
3521 N. Chapel Hill Rd. / McHenry, Illinois 60051

SCALE: None

DATE: 01-25-16

APPROVED BY:

Tj Klotz

DRAWN BY TJK

REVISED

p/n SPT - 111

DRAWING NUMBER
B-SPT-111-4