


- HIGH CROSSTALK ATTENUATION.
- VOICE & DATA TELECOM APPLICATIONS.
- FOR V.29(9.6Kbps) MODEMS.
- DESIGNED FOR WET (90mA DC) CIRCUITS.
- HIPOT 1500Vrms.
- IMPEDANCE RATIO OF 600 Ω : 600 Ω.
- IDEAL FOR MULTIPLE RACK APPLICATIONS.
- LOW PROFILE (<.525"/13.34mm).
- UL RECOGNIZED COMPONENT - UL 1863, FILE E138250.
- ALTERNATE ECONOMY PART, SPT-126.



REVISIONS			
DATE	REV	DESCRIPTION	APPV'D
09/24/93	-1	Changed THD specification, was specified in %	TJK
02/04/2016	-2	Updated drawing; added millimeter dimensions	TJK

Note : Pin Numbers are reference only. [] = mm
 This unit is symmetrical and can be rotated 180° without changing the pin-out or electrical performance.

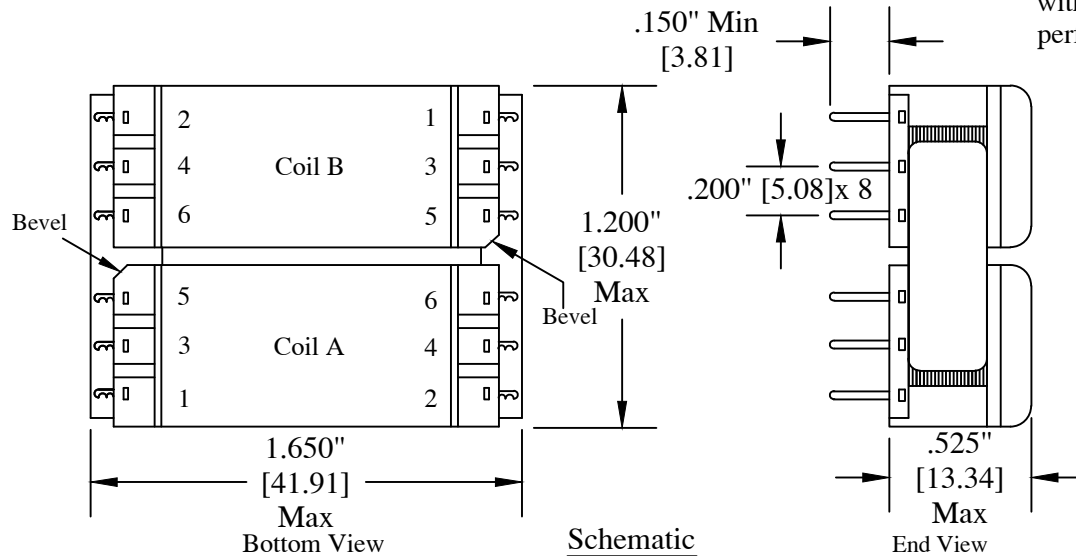

Electrical Parameters:
 Primary Impedance : 600 Ω
 Secondary Impedance : 600 Ω
 Turns Ratio : 1:1 ±2%
 DC Resistance :
 Primary 95 Ω ±10% Total
 Secondary 180 Ω ±10% Total
 Max DC Current : 90 mAdc
 Frequency Range : 300-3500Hz
 Insertion Loss : 1.85B Max @ 1KHz
 Frequency Response : ±0.5dB, 1KHz Ref.
 Return Loss : 12.0 dB Min. @ 300Hz
 Longitudinal Balance : 60dB Min. per IEEE
 Dielectric 1500Vrms : P-S-C instant
 THD @ 0dbm, 300Hz : -65dB typical
 Note : Reflected Z = 840 Ref. (Ohms) @ 1KHZ, 0mA D.C./Primary & 600 Ohm RL/Secondary

All dimensions are reference unless otherwise specified.

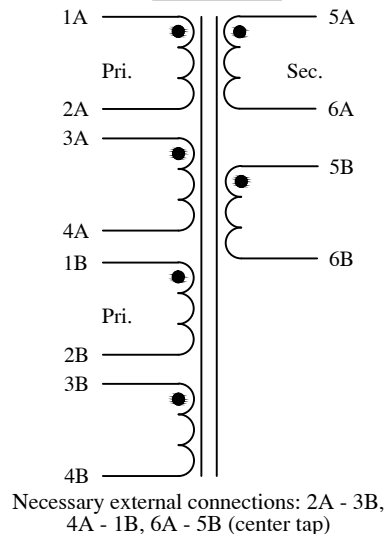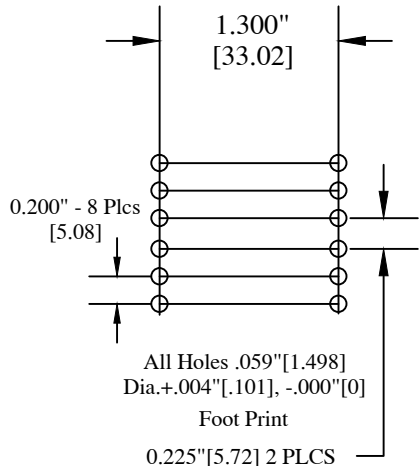

		CUSTOM ENGINEERING MAGNETIC COMPONENTS Johnsburg, Illinois 3521 N. Chapel Hill Rd. / McHenry, Illinois 60051	
		SCALE: None	APPROVED BY: <i>Tj Klotz</i>
DATE: 02-03-16			REVISED
p/n SPT - 123			DRAWING NUMBER B-SPT-123-2